


REVISIONS				
LTR	USE	DESCRIPTION	DATE	APPROVED
A		Redesign.	29-Feb-2012	RAS

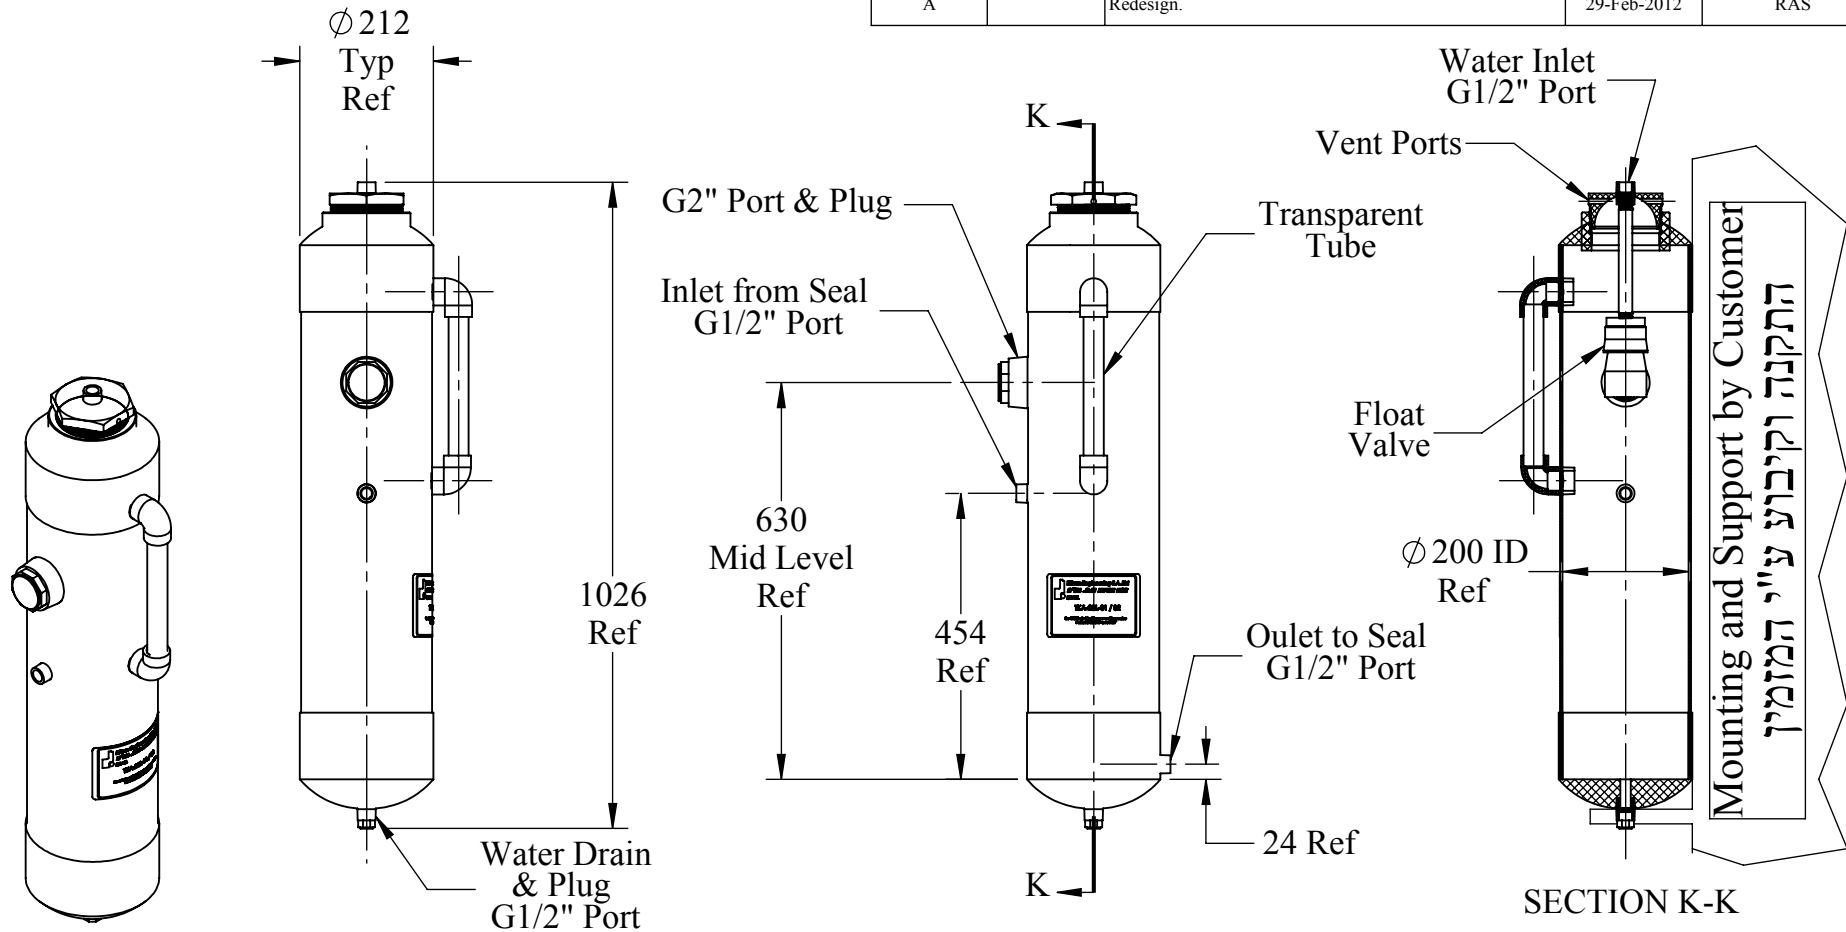


1. Tolerances are ± 5 UOS.
2. PVC vessel.
3. Transparent Plastic Level Tube.
4. Ambient Pressure & Temperature Service Only!
5. Install in Shaded area Only.
6. 20 Liter capacity at midrange level (25 Liter total).

DATA RIGHTS

This document contains information proprietary to ETTEM ENGINEERING. Neither receipt nor possession thereof confers any right to reproduce, use, or disclose, in whole or in part, any such information without written authorization.

USED ON	DIMENSIONS IN mm <u>Unless Otherwise Specified</u> 1) Corners & fillets R0.10-0.40 2) Tolerance: .x: ± 0.25 , .xx: ± 0.125 , Angles: $\pm 0.5^\circ$ 3) All diameters concentric within 0.125 TIR 4) All faces parallel within 0.125 TIR 5) All faces square to all diameters within 0.125 TIR 6) Surface finish 3.2 μ m RMS or smoother
NEXT ASSEMBLY	
MATERIAL TKA-20L-02-1	
PROCESS	

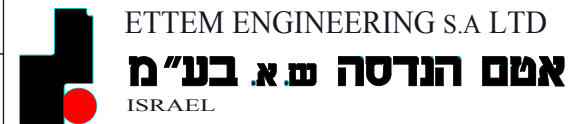

PVC Barrier Fluid Tank with Float Valve

DESCRIPTION	
P/N	TKA-20L-02
REV A	
SHEET OF	APPROVED
SCALE: None	DRAWN: RAS
DATE: 27Feb2012	

RAS